




**Electrohydraulic
underwheel
scissors type
lift**




**Electrohydraulic underwheel scissors type lift for
total wheel alignment "CT"**

Electrohydraulic underwheel scissors type lift for total wheel alignment "CT" with:
- rear oscillating platforms and recesses for front turntables. Auxiliary wheel release lift "LT".

Versions available:

ERCO XC5500 - ERCO XC5500 CT - ERCO XC5500 CT LT
ERCO XC4500 - ERCO XC4500 CT - ERCO XC4500 CT LT

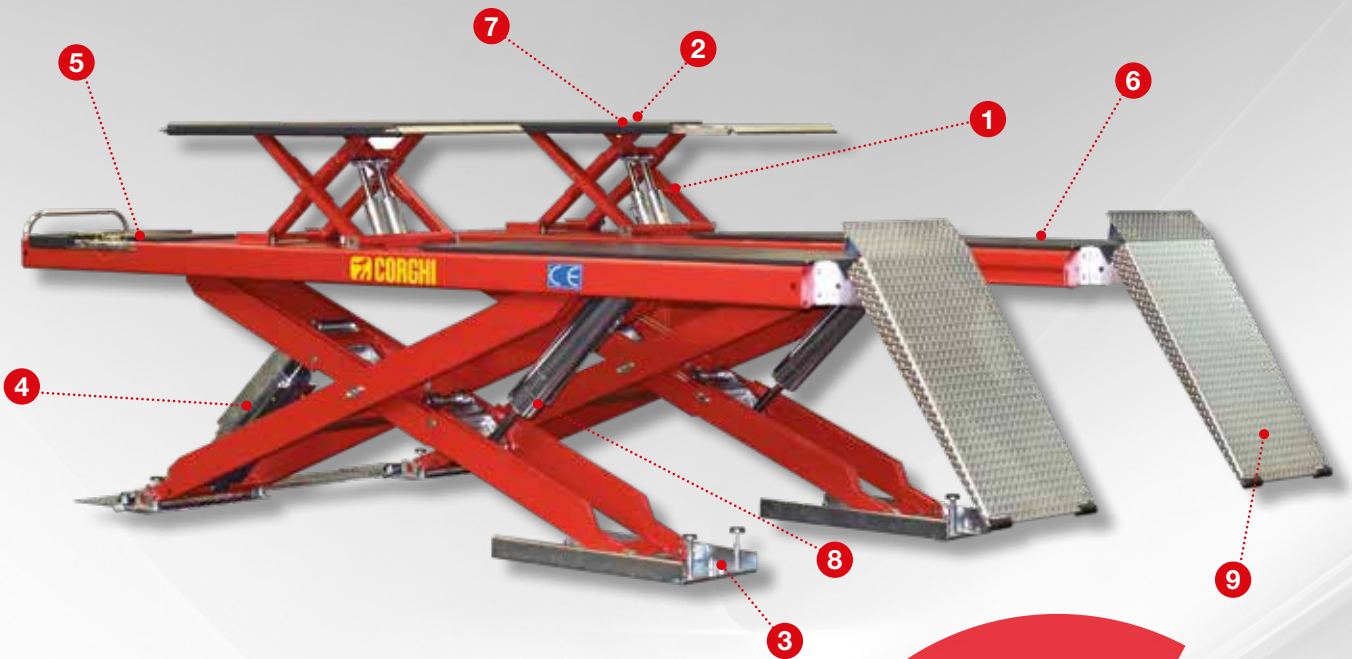

1_LIFT TABLE WITH DOUBLE CYLINDER

Lift table with **double lifting cylinder** to ensure a constant parallel lift movement.




2_CONTROL UNIT

Control unit with few **essential keys** and **clear** and **intuitive functional icons**.

3_ADJUST THE BASE FRAME

The wheel alignment versions of the range already include the possibility of **adjust the base frame**.



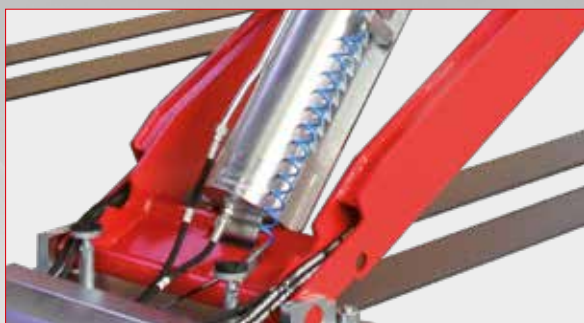

4_ADJUSTABLE MECHANICAL SAFETY DEVICE

Adjustable mechanical safety device, also for exact adjustment for wheel alignment.

5_TURNTABLE

Adjustable recess for the **turntable**.




6_SLIDING PLATES

Sliding plates with air central locking.

7_LIFT-TABLE WITH DOUBLE EXTENSIONS

Lift table with double lifting cylinder and **double extensions**, in front and rear, which is very flexible, no movement of vehicle on the lift needed.

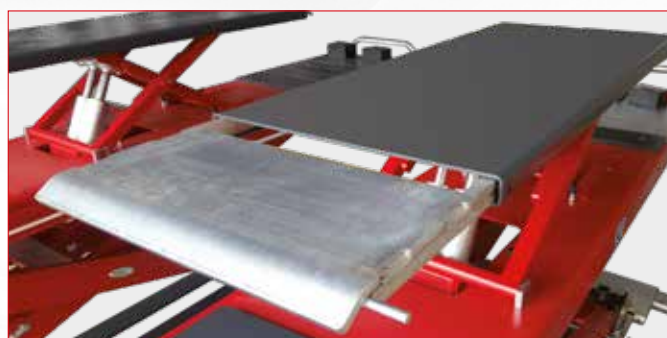

8_DOUBLE LIFTING LEVER

Double lifting lever to ensure a constant parallel lift movement.

9_SHORT RAMPS

Easy drive on with **short and sturdy ramps** due to very low height.



SUPPLIED ACCESSORIES

- Automatic runway levelling system with master/slave hydraulic circuit.
- Self-lubricating bushings on all rotating parts.
- Set of 4 rubber pads.





OPTIONAL ACCESSORIES



• Pair of cross pieces and pads for off-road vehicles. • Kit for flush installations.
See separate catalogue for further accessories.

DIMENSIONS



ERCO XC5500 - ERCO XC4500

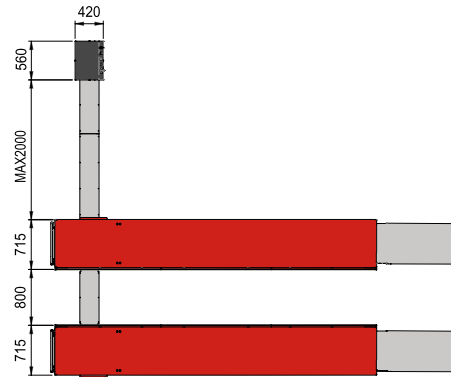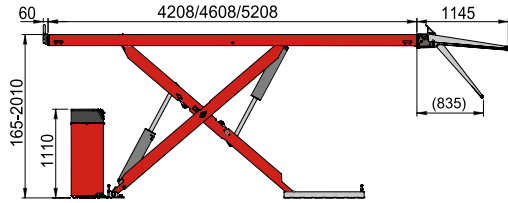

ERCO XC5500 CT - ERCO XC4500 CT

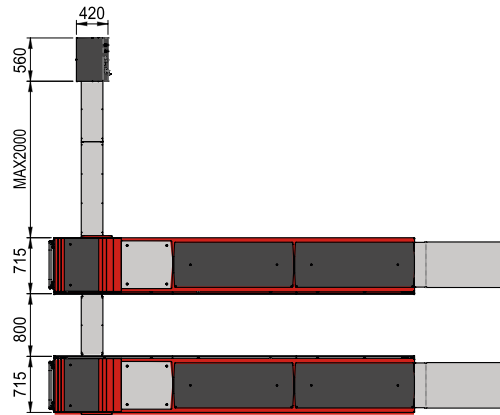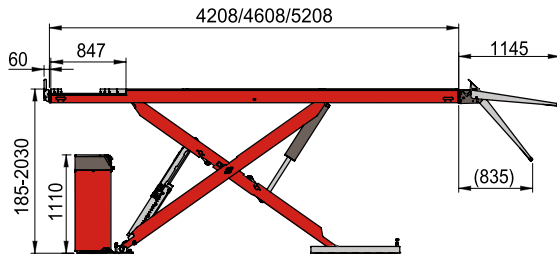

ERCO XC5500 CT LT - ERCO XC4500 CT LT

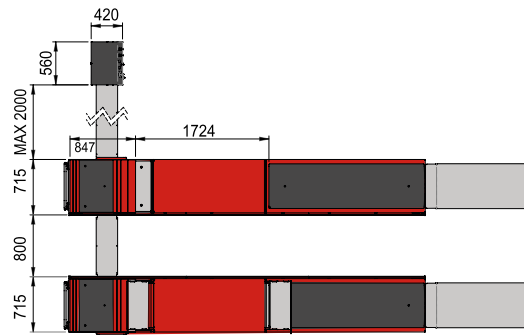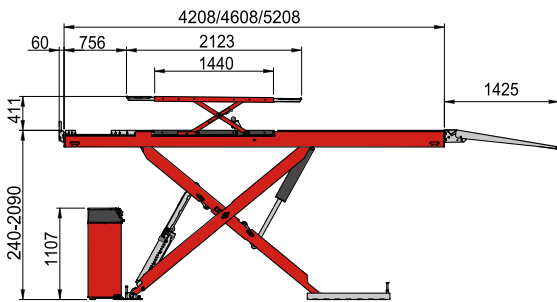

TECHNICAL DATA

ERCO XC5500 - ERCO XC5500 CT - ERCO XC5500 CT LT

Main lift capacity	5500 kg
"LT" capacity	4000 kg
Lifting time	45 s
Motor	400/230V - 3kW 3Ph - 50/60Hz
Main lift max.lifting height	2010/2030/2090 mm
"LT" max.lifting height	411 mm
lift minimum height	165/185/240 mm
Runboard length	4608/5208 mm

ERCO XC4500 - ERCO XC4500 CT - ERCO XC4500 CT LT

Main lift capacity	4500 kg
"LT" capacity	4000 kg
Lifting time	45 s
Motor	400/230V - 3kW 3Ph - 50/60Hz
Main lift max.lifting height	2010/2030/2090 mm
"LT" max.lifting height	411 mm
lift minimum height	165/185/240 mm
Runboard length	4208 mm



NEXION SPA - www.corghi.com - info@corghi.com

The manufacturer reserves the right to modify the features of its products at any time.

Designed in
ITALY

Cod. DPCG001367 05/2024

