



# **EQUIPMENT CATALOGUE EXPORT**

## **C-LINE**

**Lifting Equipment  
And Original Accessories**

**EFFECTIVE FROM JANUARY 2024**

---

**REL. MARCH 2024**

## ***COLOR TABLE***

- 1) The standard company color of our lifting equipment is red RAL 3002 (-> /16 or /15) and grey RAL 7016 ( /34).
- 2) Any request for special painting according to the official RAL table has a specific fee (the surcharge is listed in the Price list based on the selected range of lifters).

## ***WARNING!***

- 1) The standard company color of our lifting equipment is red RAL 3002 (-> /16 or /15) and grey RAL 7016 ( /34).
- 2) Any request for special painting according to the official RAL table has a specific fee (the surcharge is listed in the Price list based on the selected range of lifters).

Nexion SpA reserves the right to change the specifications of its products at any time without prior notice. The company declines all responsibility in the event of claims deriving from the use of non-original accessories or spare parts with consequent forfeiture of the EC declaration of conformity.

## ***ELECTRO - HYDRAULIC TWO POST LIFTS***

|  |  |
|--|--|
| ERCO HC5502  |  |
| ERCO HC4502  |  |
| COMPULSORY ACCESSORIES FOR ERCO HC5502 - ERCO HC4502 |  |
| OPTIONAL ACCESSORIES FOR ERCO HC5502 - ERCO HC4502   |  |
| ERCO HC4502 B  |  |
| ERCO HC3502 B  |  |
| COMPULSORY ACCESSORIES FOR ERCO HC4502 - ERCO HC3502 |  |
| OPTIONAL ACCESSORIES FOR ERCO HC4502 - ERCO HC3502 B |  |

## ***ELECTRO-HYDRAULIC UNDERBODY SCISSORS TYPE LIFTS***

|  |  |
|--|--|
| ERCO C515 B  |  |
| ERCO C510 B  |  |
| COMPULSORY ACCESSORIES FOR ERCO C515 B - ERCO C510 B |  |
| OPTIONAL ACCESSORIES FOR ERCO C515 B - ERCO C510 B   |  |

## ***LOW PROFILE DOUBLE SCISSOR LIFTS***

|  |  |
|--|--|
| ERCO C632 EF   |  |
| ERCO C636 EF   |  |
| COMPULSORY ACCESSORIES FOR ERCO C 362 EF - ERCO C 636 EF |  |
| OPTIONAL ACCESSORIES FOR ERCO C632 EF - ERCO C636 EF     |  |

## ***HIGH PROFILE DOUBLE SCISSOR LIFTS***

|  |  |
|--|--|
| ERCO C361T E   |  |
| ERCO C401T E   |  |
| COMPULSORY ACCESSORIES FOR ERCO C 361T E AND ERCO C 401T E |  |
| OPTIONAL ACCESSORIES FOR ERCO C 361T E AND ERCO C 401T E   |  |

|           |  |           |
|-----------|--|-----------|
| <b>4</b>  | <b><i>LOW PROFILE PLATFORM SCISSOR LIFTS</i></b> | <b>21</b> |
| 4         | ERCO XC5500 CT LT                                | 21        |
| 5         | ERCO XC5500 CT                                   | 22        |
| 6         | ERCO XC5500                                      | 23        |
| 6         | ERCO XC4500 CT LT                                | 24        |
| 7         | ERCO XC4500 CT                                   | 25        |
| 8         | ERCO XC4500                                      | 26        |
| 9         | COMPULSORY ACCESSORIES FOR ERCO XC5500 - XC4500  | 27        |
| 9         |  |           |
| <b>10</b> |  |           |
| 10        |  |           |
| 11        |  |           |
| 12        |  |           |
| 12        |  |           |
| <b>14</b> |  |           |
| 14        |  |           |
| 15        |  |           |
| 16        |  |           |
| 16        |  |           |
| <b>18</b> |  |           |
| 18        |  |           |
| 19        |  |           |
| 20        |  |           |
| 20        |  |           |

## ERCO HC5502



### Main features:

- Capacity: 5.500 kg.
- Possibility of installation in symmetrical or asymmetric version.
- Lifting system: with hydraulic cylinders and synchronisation with wire ropes on the column top.
- Standard height of two-post connection: 4,050 mm.
- Single motor.
- Electro magnet safety release 24V.
- Three-stage symmetric arms with pads adjustable in height and extensions supplied as standard.
- Anticrushing safety bar as standard.
- Minimum lifting height: 100 mm.
- Maximum lifting height: 2.080 mm.


Also available versions (with optional column extension set):

-V: High version specific for vans

(Height of two-post connection: 4,620 mm).

-XV: Extra-above version specific for vans and very high vehicles (Height of two-post connection: 5.220 mm).

**5.500 KG**



| pn             | power/supply     | description  |  |
|----------------|------------------|--|--|
| 0-43107700 /15 | 400V/3Ph/50-60Hz | <b>ERCO HC5502</b> - Red RAL 3002 Orange peel - Capacity 5.500 kg. |  |
| 0-43107702/15  | 230V/1Ph/50Hz    | <b>ERCO HC5502</b> - Red RAL 3002 Orange peel - Capacity 5.500 kg. |  |
| 0-43107703/15  | 230V/1Ph/60Hz    | <b>ERCO HC5502</b> - Red RAL 3002 Orange peel - Capacity 5.500 kg. |  |
| 8-43100216     |                  | <b>Customization kit</b> for ERCO HC5502 (Compulsory)              |  |

## ERCO HC4502



**Main features:**

- Capacity: 4.500 kg.
- Possibility of installation in symmetrical or asymmetric version.
- Lifting system: with hydraulic cylinders and synchronisation with wire ropes on the column top.
- Standard height of two-post connection: 4,050 mm.
- Single motor.
- Electro magnet safety release 24V.
- Three-stage symmetric arms with pads adjustable in height and extensions supplied as standard.
- Anticrushing safety bar as standard.
- Minimum lifting height: 100 mm.
- Maximum lifting height: 2.080 mm.

Also available versions (with optional column extension set):


-V: High version specific for vans

(Height of two-post connection: 4,620 mm).

-XV: Extra-above version specific for vans and very high vehicles




(Height of two-post connection: 5.220 mm).

**4.500 KG**



| pn             | power/supply     | description  |
|----------------|------------------|--|
| 0-43107800 /15 | 400V/3Ph/50-60Hz | <b>ERCO HC4502</b> - Red RAL 3002 Orange peel - Capacity 4.500 kg. |
| 0-43107802/15  | 230V/1Ph/50Hz    | <b>ERCO HC4502</b> - Red RAL 3002 Orange peel - Capacity 4.500 kg. |
| 0-43107803/15  | 230V/1Ph/60Hz    | <b>ERCO HC4502</b> - Red RAL 3002 Orange peel - Capacity 4.500 kg. |
| 8-43100217     |                  | <b>Customization kit</b> for ERCO HC4502 (Compulsory)              |

## ELECTRO-HYDRAULIC TWO POST LIFTS

| Picture   | Description  | Code                                      |  |
|---|--|---|--|
| <b>COMPULSORY ACCESSORIES FOR ERCO HC5502 - ERCO HC4502</b>                         |  |   |  |
|    | <p><b>Set of masonry screws</b> (16 pcs.)<br/>For all models in the range</p>  | 8-43100161                                |  |
| <b>OPTIONAL ACCESSORIES FOR ERCO HC5502 - ERCO HC4502</b>                           |  |   |  |
|   | <p><b>Column extension set</b> L = 570 mm - (H = 4.620 mm)*.</p> <p><b>Column extension set</b> L = 1.170 mm - (H = 5.220 mm)*.</p> <p>*: Not available for ERCO HC6502.</p> | <p>8-43100224/15</p> <p>8-43100225/15</p> |  |
|  | <p>Manual emergency <b>descent pump</b></p>  | 8-43100205                                |  |


## ERCO HC4502 B



**Main features:**

- Capacity: 4.500 kg.
- Single motor.
- Lifting system: with hydraulic cylinders and synchronisation with wire ropes on the column base.
- Three-stage asymmetric arms with pads adjustable in height and extensions supplied as standard.
- Minimum lifting height: 95 mm.
- Maximum lifting height: 1.945 mm

**4.500 KG**



| pn            | power/supply     | description   |  |
|---------------|------------------|---|--|
| 0-43107400/48 | 400V/3Ph/50-60Hz | <b>ERCO HC4502 B</b> - Grey RAL 7040 Orange peel - Capacity 4.500 kg. |  |
| 0-43107402/48 | 230V/1Ph/50Hz    | <b>ERCO HC4502 B</b> - Grey RAL 7040 Orange peel - Capacity 4.500 kg. |  |
| 0-43107403/48 | 230V/1Ph/60Hz    | <b>ERCO HC4502 B</b> - Grey RAL 7040 Orange peel - Capacity 4.500 kg. |  |
| 8-43100214    |                  | <b>Customization kit</b> for ERCO HC4502 B (Compulsory)               |  |

**OTHER COLORS THAN THE STANDARD ARE NOT CURRENTLY PROVIDED**


## ERCO HC3502 B



**Main features:**

- Capacity: 3.500 kg.
- Single motor.
- Lifting system: with hydraulic cylinders and synchronisation with wire ropes on the column base.
- Three-stage arms with pads adjustable in height and extensions supplied as standard.
- Minimum lifting height: 95 mm.
- Maximum lifting height: 1.945 mm

**3.500 KG**


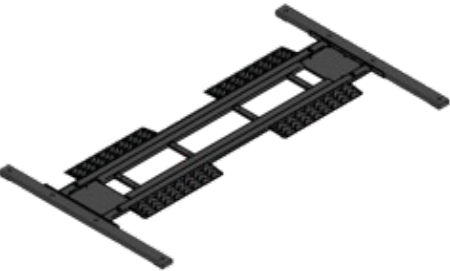



| pn            | power/supply     | description   |  |
|---------------|------------------|---|--|
| 0-43107500/48 | 400V/3Ph/50-60Hz | <b>ERCO HC3502 B</b> - Grey RAL 7040 Orange peel - Capacity 3.500 kg. |  |
| 0-43107502/48 | 230V/1Ph/50Hz    | <b>ERCO HC3502 B</b> - Grey RAL 7040 Orange peel - Capacity 3.500 kg. |  |
| 0-43107503/48 | 230V/1Ph/60Hz    | <b>ERCO HC3502 B</b> - Grey RAL 7040 Orange peel - Capacity 3.500 kg. |  |
| 8-43100212    |                  | <b>Customization kit</b> for ERCO HC3502 B (Compulsory)               |  |

**OTHER COLORS THAN THE STANDARD ARE NOT CURRENTLY PROVIDED**



## ELECTRO-HYDRAULIC TWO POST LIFTS

| Picture   | Description  | Code       |  |
|---|--|------------|--|
| <b>COMPULSORY ACCESSORIES FOR ERCO HC4502 - ERCO HC3502</b>                         |  |            |  |
|    | <p><b>Set of masonry screws</b> (10 pcs.)<br/>For all models in the range</p>                    | 8-43100233 |  |
| <b>OPTIONAL ACCESSORIES FOR ERCO HC4502 - ERCO HC3502 B</b>                         |  |            |  |
|   | <p><b>Main frame kit RAL7016</b><br/>(To be order in case of location with critical floors).</p> | 8-43100222 |  |
|  | <p>Manual emergency <b>descent pump</b></p>  | 8-43100205 |  |

## ERCO C515 B


Main features:

- Capacity: 3.600 kg.
- For tyre specialists, car workshops and body repairers.
- Alignment of the runways by 2 anti-torsion connection bars.
- Built-in ascent and descent ramps to the runways.
- Automatic engagement of mechanical safety locks with pneumatic release system.
- Equipped with anti-crushing foot guard.
- Low voltage control unit with «dead-man» control system.
- Low profile configuration for on-floor installations.
- Runboard height from ground: 115 mm.
- Max. lifting height: 1000 mm.
- Runboard length: 2.040 (open ramps)



All models supplied with:  
-1 Set of 4 hard rubber blocks.

**3.600 KG**



| pn            | power/supply          | description  |  |
|---------------|-----------------------|--|--|
| 0-41106600/15 | 230V/400V-3PH-50/60HZ | <b>ERCO C515 B</b> - Red RAL 3002 Orange peel - Capacity 3.600 kg. |  |
| 0-41106602/15 | 230V/1Ph/50Hz         | <b>ERCO C515 B</b> - Red RAL 3002 Orange peel - Capacity 3.600 kg. |  |
| 0-41106603/15 | 230V/1Ph/60Hz         | <b>ERCO C515 B</b> - Red RAL 3002 Orange peel - Capacity 3.600 kg. |  |
| 8-41100195    |                       | <b>Customization kit</b> for ERCO C515 B (Compulsory)              |  |


## ERCO C510 B



All models supplied with:  
-1 Set of 4 hard rubber blocks.


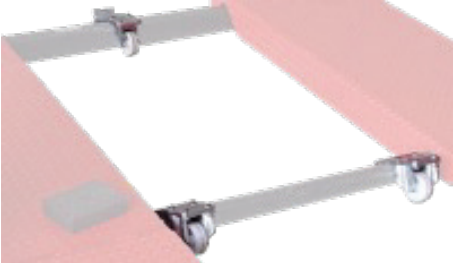
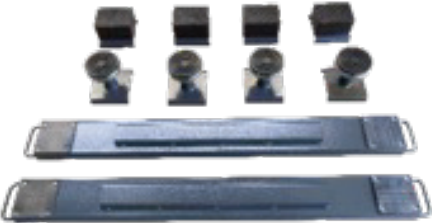

- Main features:
- Capacity: 3.200 kg.
  - For tyre specialists, car workshops and body repairers.
  - Alignment of the runways by 2 anti-torsion connection bars.
  - Built-in ascent and descent ramps to the runways.
  - Automatic engagement of mechanical safety locks with pneumatic release system.
  - Equipped with anti-crushing foot guard.
  - Low voltage control unit with «dead-man» control system.
  - Low profile configuration for on-floor installations.
  - Runboard height from ground: 115 mm.
  - Max. lifting height: 1000 mm.
  - Runboard length: 2.040 (open ramps)

**3.200 KG**




| pn            | power/supply          | description  |  |
|---------------|-----------------------|--|--|
| 0-41106500/15 | 230V/400V-3PH-50/60HZ | <b>ERCO C510 B</b> - Red RAL 3002 Orange peel - Capacity 3.200 kg. |  |
| 0-41106502/15 | 230V/1Ph/50Hz         | <b>ERCO C510 B</b> - Red RAL 3002 Orange peel - Capacity 3.200 kg. |  |
| 0-41106503/15 | 230V/1Ph/60Hz         | <b>ERCO C510 B</b> - Red RAL 3002 Orange peel - Capacity 3.200 kg. |  |
| 8-41100194    |                       | <b>Customization kit</b> for ERCO C510 B (Compulsory)              |  |

## ELECTRO-HYDRAULIC UNDERBODY SCISSORS TYPE LIFTS

| Picture   | Description  | Code       |  |
|---|--|------------|--|
| <b>COMPULSORY ACCESSORIES FOR ERCO C515 B - ERCO C510 B</b>                         |  |            |  |
|    | <p><b>Set of masonry screws</b> (8 pcs.)<br/>For all models in the range.</p>  | 8-41100203 |  |
| <b>OPTIONAL ACCESSORIES FOR ERCO C515 B - ERCO C510 B</b>                           |  |            |  |
|    | <p><b>M320</b> Moving wheel set for mobile version.<br/>Available for model ERCO C510 B only.</p> <p>Note: the lift with the mounted accessory is downgraded to 3000 kg.<br/>And is not reversible</p> | 8-41100320 |  |
|  | <p><b>Crossbar set</b> (2 bars and 4 pads), L=1800 mm.</p>   | 8-42300047 |  |
|  | <p><b>Pad set</b> (4 pcs.) H = 80 mm.</p>  | 8-42300027 |  |

**ELECTRO-HYDRAULIC UNDERBODY SCISSORS TYPE LIFTS**
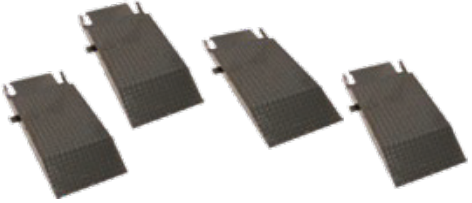
| Picture   | Description  | Code       |  |
|---|--|------------|--|
| <b>COMPULSORY ACCESSORIES FOR ERCO C515 B - ERCO C510 B</b>                       |  |            |  |
|  | <b>Long ramps</b> for vehicles with spoiler having length 1.200 mm (4 pcs) | 8-44600003 |  |

## ERCO C632 EF


Main features:

Low profile double scissor lift Alignment of the runways with a dual MASTER/SLAVE circuit without mechanical safety racks. Runboards version with flaps (F). Capacity: 3.200 kg



All models supplied with:  
-1 Set of 4 hard rubber blocks.

**3.200 KG**



| pn            | power/supply          | description   |  |
|---------------|-----------------------|---|--|
| 0-41106000/15 | 230V/400V-3PH-50/60HZ | <b>ERCO C632 EF</b> - Red RAL 3002 Orange peel - Capacity 3.200 kg. |  |
| 0-41106002/15 | 230V/1Ph/50Hz         | <b>ERCO C632 EF</b> - Red RAL 3002 Orange peel - Capacity 3.200 kg. |  |
| 0-41106003/15 | 230V/1Ph/60Hz         | <b>ERCO C632 EF</b> - Red RAL 3002 Orange peel - Capacity 3.200 kg. |  |
| 8-41100189    |                       | <b>Customization kit</b> for ERCO C632 EF (Compulsory)              |  |

## ERCO C636 EF


Main features:

Low profile double scissor lift. Alignment of the runways with a dual MASTER/SLAVE circuit without mechanical safety racks. Runboards version with flaps (F).  
Capacity: 3.600 kg




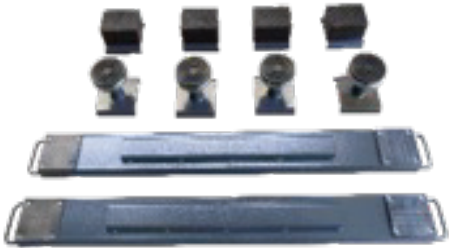
All models supplied with:  
-1 Set of 4 hard rubber blocks.

**3.600 KG**




| pn            | power/supply          | description   |  |
|---------------|-----------------------|---|--|
| 0-41106100/15 | 230V/400V-3PH-50/60HZ | <b>ERCO C636 EF</b> - Red RAL 3002 Orange peel - Capacity 3.600 kg. |  |
| 0-41106102/15 | 230V/1Ph/50Hz         | <b>ERCO C636 EF</b> - Red RAL 3002 Orange peel - Capacity 3.600 kg. |  |
| 0-41106103/15 | 230V/1Ph/60Hz         | <b>ERCO C636 EF</b> - Red RAL 3002 Orange peel - Capacity 3.600 kg. |  |
| 8-41100190    |                       | <b>Customization kit</b> for ERCO C636 EF (Compulsory)              |  |

## LOW PROFILE DOUBLE SCISSOR LIFTS

| Picture   | Description  | Code       |  |
|---|--|------------|--|
| <b>COMPULSORY ACCESSORIES FOR ERCO C 362 EF - ERCO C 636 EF</b>                   |  |            |  |
|  | <b>Set of masonry screws</b> (8 pcs.)<br>For all models in the range.  | 8-41100203 |  |
| <b>OPTIONAL ACCESSORIES FOR ERCO C632 EF - ERCO C636 EF</b>                       |  |            |  |
|  | <b>Crossbar set</b> (2 bars and 4 pads), L=1800 mm.  | 8-42300047 |  |
| IMAGE NOT AVAILABLE   | <b>Flush installation frame set</b> (galvanized) for C-line underbody low profile double scissor lifts with flaps (must be combined with 8-41100165) | 8-41100225 |  |
| IMAGE NOT AVAILABLE   | <b>Set of long ramps</b> for on-floor version  | 8-41100207 |  |
| IMAGE NOT AVAILABLE   | <b>Extensions for pipes and cables</b> L = 1 m. (protection cover included)  | 8-41100184 |  |
| IMAGE NOT AVAILABLE   | <b>Extensions for pipes and cables</b> L = 2 m. (protection cover included)  | 8-41100185 |  |



## LOW PROFILE DOUBLE SCISSOR LIFTS

| Picture   | Description  | Code       |  |
|---|--|------------|--|
|  | <b>Kit of 4</b> rubber blocks height 80 mm.  | 8-42300027 |  |
| IMAGE NOT AVAILABLE   | Angle pipe <b>protection cover</b>   | 8-41100143 |  |
| IMAGE NOT AVAILABLE   | <b>In-pit</b> installation kit for lifts with flaps, incl. support for flaps that must be bolted to the ground - mandatory for recessed installation | 8-41100165 |  |

## ERCO C361T E


Main features:

Lift.Alignment of the runways with a dual MASTER/SLAVE circuit.  
Capacity: 3.600 kg



All models supplied with:  
-1 Set of 4 hard rubber blocks.

**3.600 KG**



| pn            | power/supply          | description   |  |
|---------------|-----------------------|---|--|
| 0-41106300/15 | 230V/400V-3PH-50/60HZ | <b>ERCO C361T E</b> - Red RAL 3002 Orange peel - Capacity 3.600 kg. |  |
| 0-41106302/15 | 230V/1Ph/50Hz         | <b>ERCO C361T E</b> - Red RAL 3002 Orange peel - Capacity 3.600 kg. |  |
| 0-41106303/15 | 230V/1Ph/60Hz         | <b>ERCO C361T E</b> - Red RAL 3002 Orange peel - Capacity 3.600 kg. |  |
| 8-41100192    |                       | <b>Customization kit</b> for ERCO C361T E (Compulsory)              |  |

## ERCO C401T E


Main features:

Lift Alignment of the runways with a dual MASTER/SLAVE circuit.  
Capacity: 4.000 kg




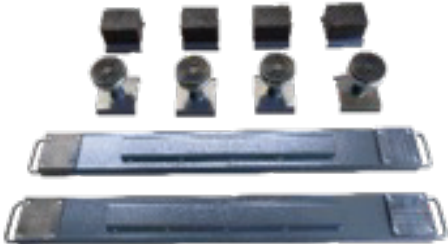

All models supplied with:  
-1 Set of 4 hard rubber blocks.

4.000 KG



| pn            | power/supply          | description   |  |
|---------------|-----------------------|---|--|
| 0-41106400/15 | 230V/400V-3PH-50/60HZ | <b>ERCO C401T E</b> - Red RAL 3002 Orange peel - Capacity 4.000 kg. |  |
| 0-41106402/15 | 230V/1Ph/50Hz         | <b>ERCO C401T E</b> - Red RAL 3002 Orange peel - Capacity 4.000 kg. |  |
| 0-41106403/15 | 230V/1Ph/60Hz         | <b>ERCO C401T E</b> - Red RAL 3002 Orange peel - Capacity 4.000 kg. |  |
| 8-41100193    |                       | <b>Customization kit</b> for ERCO C401T E (Compulsory)              |  |

## HIGH PROFILE DOUBLE SCISSOR LIFTS

| Picture   | Description   | Code       |  |
|---|---|------------|--|
| <b>COMPULSORY ACCESSORIES FOR ERCO C 361T E AND ERCO C 401T E</b>                   |   |            |  |
|    | <b>Set of masonry screws (8 pcs.)</b><br>For all models in the range        | 8-41100203 |  |
| <b>OPTIONAL ACCESSORIES FOR ERCO C 361T E AND ERCO C 401T E</b>                     |   |            |  |
|    | <b>Crossbar set</b> (2 bars and 4 pads), L=1800 mm.                         | 8-42300047 |  |
| IMAGE NOT AVAILABLE   | <b>Flush installation frame</b> set for lifts (for 4.0 and 3.6 t. capacity) | 8-41100204 |  |
| IMAGE NOT AVAILABLE   | <b>Extensions</b> for pipes and cables L = 1 m. (protection cover included) | 8-41100184 |  |
| IMAGE NOT AVAILABLE   | <b>Extensions</b> for pipes and cables L = 2 m. (protection cover included) | 8-41100185 |  |
|  | <b>Kit of 4</b> rubber blocks height 80 mm                                  | 8-42300027 |  |

## ERCO XC5500 CT LT



Main features:


Low profile platform scissor lift with lifting table for wheel alignment.  
Automatic runway levelling system with master/slave hydraulic circuit.  
Capacity: 5.500 kg  
Runway length: 4600 mm / 5200 mm



All models supplied with:-1 Set of 4 hard rubber blocks.

**DELIVERY AVAILABLE FROM CHINA ONLY**

**5.500 KG**



| pn            | power/supply         | description   |  |
|---------------|----------------------|---|--|
| 0-42116000/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500 CT LT, with LT Lift table</b> , runway length 4.600 mm                       |  |
| 8-42100163    |                      | <b>Customization kit</b> for ERCO XC5500 CT LT compulsory                                   |  |
| 0-42116010/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500 CT LT I, with LT lift table</b> , runway length 4600 mm, in-pit installation |  |
| 8-42100223    |                      | <b>Customization kit - ERCO XC5500 CT LT I</b> , compulsory                                 |  |
| 0-42116500/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500 CT LT, with LT lift table</b> , runway length 5200 mm                        |  |
| 8-42100219    |                      | <b>Customization kit - ERCO XC5500 CT LT</b> , compulsory                                   |  |
| 0-42116510/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500 CT LT I, with LT lift table</b> , runway length 5200 mm, in-pit installation |  |
| 8-42100224    |                      | <b>Customization kit - ERCO XC5500 CT LT</b> , compulsory                                   |  |

## ERCO XC5500 CT


Main features:

Low profile platform scissor lift for wheel alignment.  
Automatic runway levelling system with master/slave hydraulic circuit.  
Capacity: 5.500 kg  
Runway length: 4600 mm / 5200 mm



All models supplied with:-1 Set of 4 hard rubber blocks.

**DELIVERY AVAILABLE FROM CHINA ONLY**



| pn            | power/supply         | description  |  |
|---------------|----------------------|--|--|
| 0-42112100/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500 CT</b> , runway length 4.600 mm                       |  |
| 8-42100164    |                      | <b>Customization kit</b> for ERCO XC5500 CT compulsory               |  |
| 0-42112110/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500 CT I</b> , runway length 4600 mm, in-pit installation |  |
| 8-42100226    |                      | <b>Customization kit</b> - ERCO XC5500 CT I, compulsory              |  |
| 0-42116600/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500 CT</b> , runway length 5200 mm                        |  |
| 8-42100220    |                      | <b>Customization kit</b> - ERCO XC5500 CT, compulsory                |  |
| 0-42116610/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500 CT I</b> , runway length 5200 mm, in-pit installation |  |
| 8-42100227    |                      | <b>Customization kit</b> - ERCO XC5500 CT, compulsory                |  |

## ERCO XC5500

Main features:


Low profile platform scissor lift for service/inspection.  
Automatic runway levelling system with master/slave hydraulic circuit.  
Capacity: 5.500 kg  
Runway length: 4600 mm / 5200 mm



All models supplied with:-1 Set of 4 hard rubber blocks.

**DELIVERY AVAILABLE FROM CHINA ONLY**

**5.500 KG**



| pn            | power/supply         | description   |  |
|---------------|----------------------|---|--|
| 0-42112300/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500</b> , runway length 4.600 mm                       |  |
| 8-42100166    |                      | <b>Customization kit</b> for ERCO XC5500 compulsory               |  |
| 0-42112310/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500 I</b> , runway length 4600 mm, in-pit installation |  |
| 8-42100229    |                      | <b>Customization kit</b> - ERCO XC5500 CT I, compulsory           |  |
| 0-42116800/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500</b> , runway length 5200 mm                        |  |
| 8-42100221    |                      | <b>Customization kit</b> - ERCO XC5500, compulsory                |  |
| 0-42116810/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC5500 I</b> , runway length 5200 mm, in-pit installation |  |
| 8-42100230    |                      | <b>Customization kit</b> - ERCO XC5500, compulsory                |  |

## ERCO XC4500 CT LT

Main features:


Low profile platform scissor lift with lifting table for wheel alignment.  
Automatic runway levelling system with master/slave hydraulic circuit.  
Capacity: 4.500 kg  
Runway length: 4200 mm



All models supplied with:-1 Set of 4 hard rubber blocks.

**DELIVERY AVAILABLE FROM CHINA ONLY**

**4.500 KG**



| pn            | power/supply         | description   |  |
|---------------|----------------------|---|--|
| 0-42116100/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC4500 CT LT</b> , with LT lift table, runway length 4200 mm                        |  |
| 8-42100167    |                      | <b>Customization kit</b> - ERCO XC4500 CT LT, compulsory                                    |  |
| 0-42116110/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC4500 CT LT I</b> , with LT lift table, runway length 4200 mm, in-pit installation |  |
| 8-42100222    |                      | <b>Customization kit</b> - ERCO XC4500 CT LT I, compulsory                                  |  |



## ERCO XC4500 CT

Main features:


Low profile platform scissor lift with lifting table for wheel alignment.  
Automatic runway levelling system with master/slave hydraulic circuit.  
Capacity: 4.500 kg  
Runway length: 4200 mm



All models supplied with:-1 Set of 4 hard rubber blocks.

**DELIVERY AVAILABLE FROM CHINA ONLY**

**4.500 KG**



| pn            | power/supply         | description   |  |
|---------------|----------------------|---|--|
| 0-42116200/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC4500 CT</b> , runway length 4200 mm   |  |
| 8-42100168    |                      | <b>Customization kit - ERCO XC4500 CT LT</b> , compulsory                                   |  |
| 0-42116210/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC4500 CT LT I</b> , with LT lift table, runway length 4200 mm, in-pit installation |  |
| 8-42100225    |                      | <b>Customization kit - ERCO XC4500 CT LT I</b> , compulsory                                 |  |

## ERCO XC4500

Main features:


Low profile platform scissor lift with lifting table for wheel alignment.  
Automatic runway levelling system with master/slave hydraulic circuit.  
Capacity: 4.500 kg  
Runway length: 4200 mm



All models supplied with:-1 Set of 4 hard rubber blocks.




**DELIVERY AVAILABLE FROM CHINA ONLY**

**4.500 KG**





| pn            | power/supply         | description   |  |
|---------------|----------------------|---|--|
| 0-42116400/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC4500</b> , runway length 4200 mm                        |  |
| 8-42100170    |                      | <b>Customization kit</b> - ERCO XC4500, compulsory                |  |
| 0-42116410/15 | 230-400V/3Ph/50-60Hz | <b>ERCO XC4500 I</b> , runway length 4200 mm, in-pit installation |  |
| 8-42100228    |                      | <b>Customization kit</b> - ERCO XC4500 I, compulsory              |  |

## LOW PROFILE PLATFORM SCISSOR LIFTS
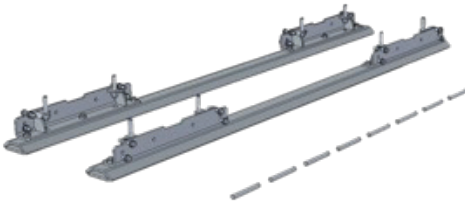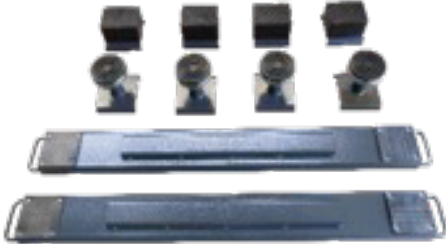
| Picture   | Description   | Code       |  |
|---|---|------------|--|
| <b>COMPULSORY ACCESSORIES FOR ERCO XC5500 - XC4500</b>                              |   |            |  |
|    | <b>Set of cross bars</b> , to be ordered with the lift, compulsory for usage of 2 jacking beams, recommended for wheel alignment, standard colour grey RAL 7016 fixed | 8-42100218 |  |
|    | <b>Crossbar set</b> (2 bars and 4 pads), L=1800 mm.   | 8-42300047 |  |
|  | <b>Kit of 4 rubber</b> blocks height 80 mm.   | 8-42300027 |  |
| IMAGE NOT AVAILABLE   | Complete low- <b>voltage lighting kit</b>   | 8-42100185 |  |
| IMAGE NOT AVAILABLE   | <b>Extension</b> for pipes = 2 mt (for lift with LT)  | 8-42100183 |  |
| IMAGE NOT AVAILABLE   | <b>Extension</b> for pipes = 4 mt (for lift with LT)  | 8-42100184 |  |
| IMAGE NOT AVAILABLE   | <b>Extension</b> for pipes = 2 mt (for lift without LT)   | 8-42100173 |  |
| IMAGE NOT AVAILABLE   | <b>Extension</b> for pipes = 4 mt (for lift without LT)   | 8-42100174 |  |

## LOW PROFILE PLATFORM SCISSOR LIFTS
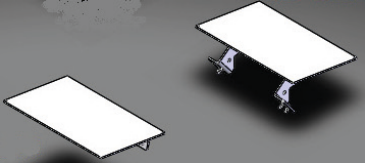
| Picture   | Description   | Code                 |  |
|---|---|----------------------|--|
|  | <p><b>Scissor Jack</b> 2,2 ton. Gray Ral 7016<br/>Can only be used together with set of cross bars P/N 8-42100218</p> | <p>J804-0000000</p>  |  |
|  | <p><b>Transformation kit</b> from surface-mounted to recessed installation</p>  | <p>8-42100234/00</p> |  |





**NEXION S.p.A.**  
Strada Statale 468 n° 9 - 42015 CORREGGIO - R.E. - ITALY  
Tel. +39 0522 639.111 - Fax +39 0522 639.150 - [www.corgchi.com](http://www.corgchi.com) - [info@corgchi.com](mailto:info@corgchi.com)



Per aiutare il pianeta ottimizzando il consumo di carta, i nostri cataloghi sono consultabili sul sito [www.corgchi.com](http://www.corgchi.com). Una stampa responsabile aiuta a preservare l'ambiente.

The manufacturer reserves the right to modify the features of its products at any time.  
09-2024